


Cassette type split air conditioner

Indoor unit technical data

| MODEL | ACI-53HPR1 | | |
|--------------------------|-------------------------|--------------|---------|
| Power consumption | 230/1/50 | | V/ph/Hz |
| | Cooling mode | Heating mode | |
| Capacity | 5280 | 5860 | W |
| Power input | 1830 | 1880 | W |
| Max input current | 15.0 | | A |
| Eficiency (EER/COP) | 2.89 | 3.19 | |
| Refrigerant | R410a (1400 g) | | |
| Ventilator model | YDK37-4P | | |
| Ventilator brand | Welling | | |
| Ventilator air flow | Hi/Med/Low | 860/760/500 | m3/h |
| Ventilator power | | 65/46/32 | W |
| Sound Pressure (Lp) | Hi/Med/Low | 44/41/38 | dB(A) |
| Net dimensions Body | LxHxD | 570x260x570 | mm |
| Net dimensions Panel | LxHxD | 647x50x647 | mm |
| Packing dimensions Body | LxHxD | 655x290x655 | mm |
| Packing dimensions Panel | LxHxD | 705x113x705 | mm |
| Weight Body | brutto/neto | 21/19 | kg |
| Weight panel | brutto/neto | 5.0/3.0 | kg |
| Pipe connections | liquid/gas | 1/4 - 1/2 | inch |
| | indoor condensate | 25 | mm |
| Piping distance | max lenght | 25 | m |
| | max diff level | 15 | m |
| | indoor&outdoor | 5 x 2.5 | mm2 |
| Electrical connections | indoor & outdoor signal | 2 x 0.5 | mm2 |
| | power to indoor | 3 x 2.5 | mm2 |

Outdoor unit model to been used

AOU-53HPR1

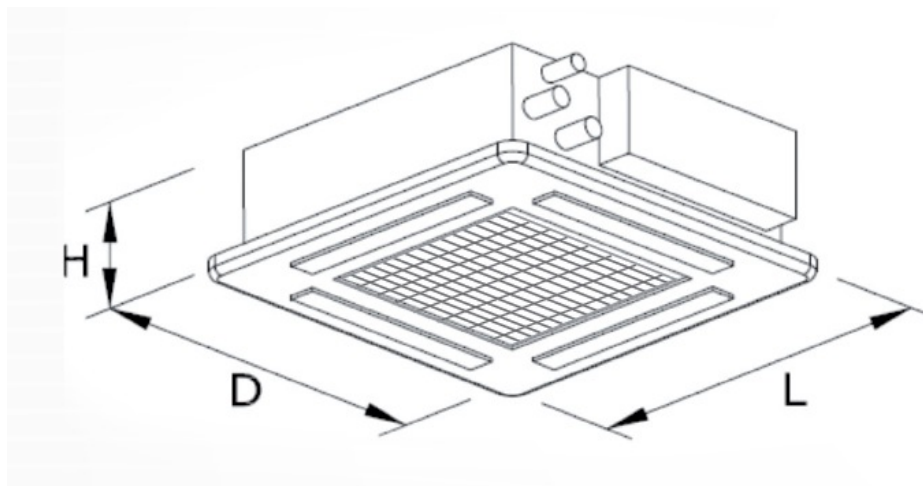

ACI-53HPR1