


Cassette type split air conditioner

Indoor unit technical data

MODEL	ACI-140HPS3		
Power consumption	380/3/50		V/ph/Hz
	Cooling mode	Heating mode	
Capacity	14100	15240	W
Power input	5150	5370	W
Max input current	10.5		A
Eficiency (EER/COP)	2.72	2.78	
Refrigerant	R410a (3250 g)		
Ventilator model	YDK90-6E		
Ventilator brand	Welling		
Ventilator air flow	Hi/Med/Low	1540/1300/1120	m3/h
Ventilator power	165/120/100		W
Sound Pressure (Lp)	Hi/Med/Low	44/43/41	dB(A)
Net dimensions Body	LxHxD	840x300x840	mm
Net dimensions Panel	LxHxD	950x55x950	mm
Packing dimensions Body	LxHxD	900x320x900	mm
Packing dimensions Panel	LxHxD	1035x90x1035	mm
Weight Body	brutto/neto	30/24	kg
Weight panel	brutto/neto	11/9	kg
Pipe connections	liquid/gas	1/2 - 3/4	inch
	indoor condensate	25	mm
Piping distance	max lenght	25	m
	max diff level	15	m
	indoor&outdoor	5 x 4.0	mm2
Electrical connections	indoor & outdoor signal	2 x 1.5	mm2
	power to indoor	3 x 4.0	mm2

Outdoor unit model to been used

AOU-140HPS3

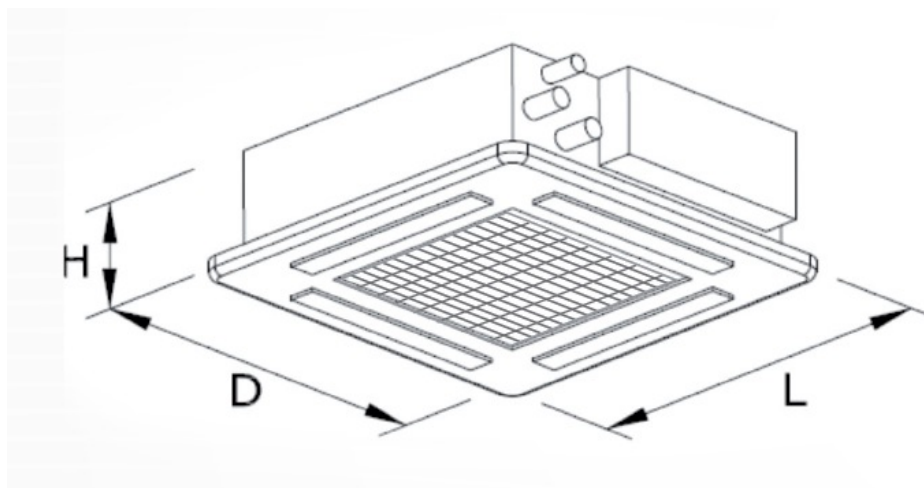

ACI-140HPS3